

Project Name:	
Type:	

WSU Series

LED Emergency Light
Wireless Reporting Compatible

PRODUCT FEATURE

HOUSING

- Polycarbonate material and waterproof design suitable for wet location
- Plastic enclosure with flame retardant
- Compact and decorative design
- Single and double face universal configuration available
- Exit letter 6" height and 3/4" stroke, snap in and snap out direction indicator

ELECTRICAL

- AC 120/277VAC dual voltage operation
- Brownout circuit protection for ST/SD fixture
- Battery low voltage protection
- Solid-State transfer circuit
- Test switch and battery charging indicator
- Maintenance free Ni-cad battery
- 24 hours recharge, more that 90 minutes discharge

MOUNTING

- Suitable for wall mount and ceiling mount
- Universal J-Box mounting pattern on back plate

ILLUMINATION

- Long life red and green LED lamps provide uniform exit sign illumination

BATTERY

- High temperature type Ni-cad battery
- Battery have to re-charge if product keep in stock 9 months
- Detail manual refer "BATTERY STOCK AND RECHARGE GUIDLINE"

OPTIONS

- Manual test switch and indicator available
- Self-testing and self-diagnostic optional
- Red and Green color exit optional
- AC only optional available
- Dual AC input AC/AC circuit available
- LynxEM® wireless testing and reporting system available

WARRANTY

- See [Limited Warranty Policy](#) for more additional information

CODE COMPLIANCE

- UL listed and meets or exceed all requirement in NFPA 70, NFPA 101 life safety code, suitable for USA market
- Suitable for 0°C to 50°C ambient temperature suitable for wet location
- CL option with heater pad Ta range -25°C to 50°C, suitable for wet location
- Compliant CEC title 20 efficiency regulations


RELATED PRODUCTS

↻ [WCU Series](#)


↻ [WMU Series](#)

↻ [S1 Series](#)

↻ [S3 Series](#)

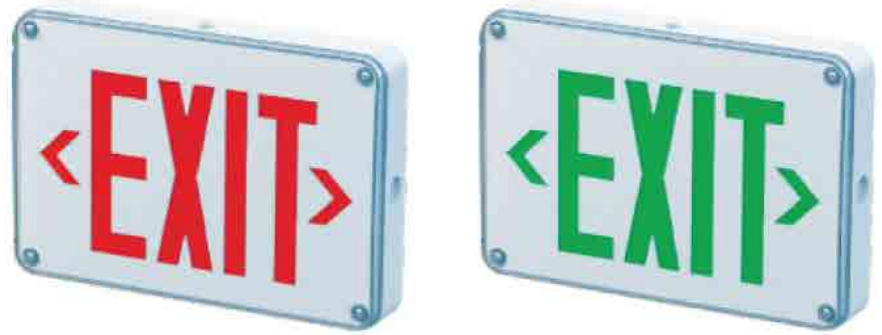

PRODUCT DIMENSION

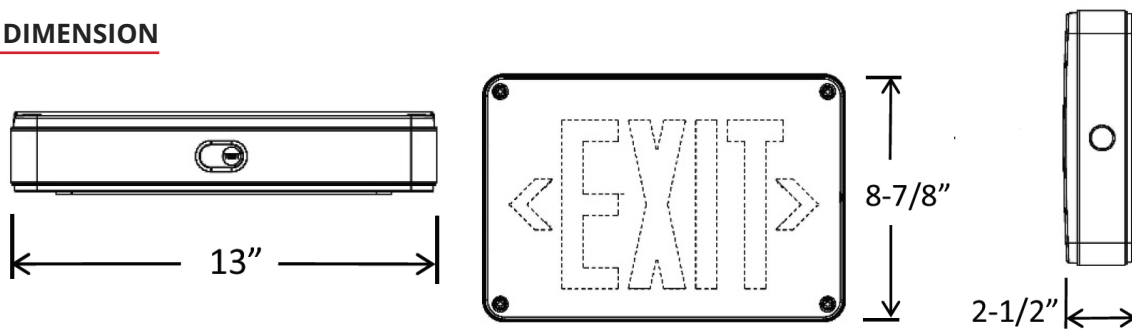

ORDER INFORMATION: EXAMPLE: WSU-G-2AC-ZD-WH-U-1

WSU	-	-	-	-	-	-
MODEL	EXIT SIGN	BATTERY BACKUP OR AC ONLY	OPTION (FOR BATTERY BACKUP MODEL)	HOUSIGN COLOR	PANEL OPTION	INPUT VOLTAGE
WSU Exit Sign	R Red color, single face	BLANK Battery backup	BLANK Manual test	WH White	U Extra one more exit panel for single and double face universal	1 120/277VAC
	G Green color, single face	AC AC input only 2AC Dual AC input AC/AC circuit	CT Self-testing/ Self-diagnostics CL Suitable for cold location ZD Wireless Reporting LynxEM® Control	BK Black		

Project Name:	
Type:	

WSU Series

LED Emergency Light
Wireless Reporting Compatible

PACKAGING

QTY : 6 PCS
N.W : 12.4 KGS
G.W : 13.7 KGS
MEA'S : 1.75 CUFT

