

Project Name:	
Type:	

MRSEL(RMSEL)-800

LED Emergency Light
Wireless Reporting Compatible

PRODUCT FEATURE

HOUSING

- Recessed housing with hanger bar
- Aluminum housing with high grade acrylic panel
- Replaceable acrylic exit panel
- Removable directional indicator
- Single and double face universal design
- Removable front cover for easy installation and maintenance
- 8" height red exit sign
- Single and double face optional
- Suitable for damp location



MRSEL
Big steel box with hanger bar



RMSEL
J-box with hanger bar

ELECTRICAL

- 120/277VAC dual voltage operation
- Test switch and charge rate indicator
- Self-test and Self-diagnostics function is available for battery backup model
- fully automatic, solid state charger
- Brown out circuit with overload and short circuit protection

LISTING

- Suitable for use in 10°C - 40°C ambient temperature, suitable for damp location
- UL listed meets or exceeds all requirement in NFPA 70, NFPA 101 life safe code

WARRANTY

- See [Limited Warranty Policy](#) for more additional information



RELATED PRODUCTS

- ◊ [SCEL8000 Emergency light](#)
- ◊ [SCEL800 Emergency light](#)
- ◊ [MEXL-960 Emergency light](#)
- ◊ [MS3 New York Solution](#)

MOUNTING

- Recessed mounting

PRODUCT DIMENSION

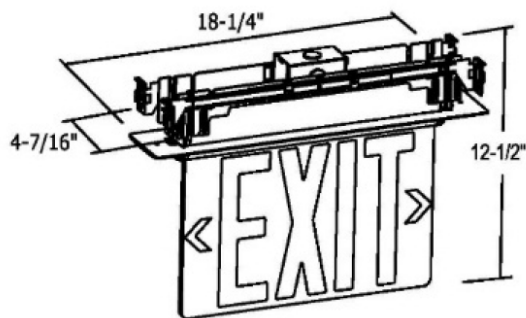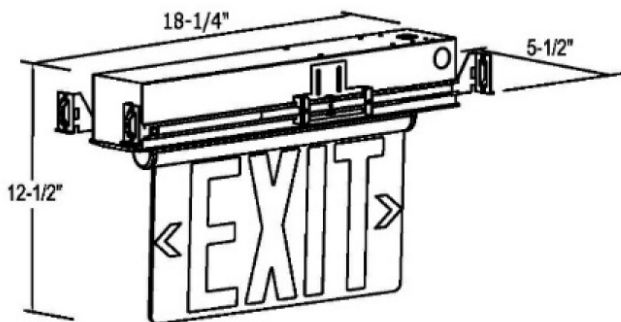

ORDER INFORMATION: EXAMPLE: MRSEL(RMSEL)-810-D-R-ZD-AL-U

MRSEL / RMSEL	-		-		-	-		-		-		-		
MODEL	SERIES		NUMBER OF FACCE		LETTER	BACKGROUND		FUNCTION		HOUSING COLOR		PANEL		
MRSEL	800	Battery backup	S	Single face	R	Red	C	Clear	BLANK	Standard circuit	AL	Aluminum	BLACK	Standard type
RMSEL	810	AC only	D	Double face			M	Mirror	CT	Self-Diagnostic	WH	White	U	Including single and double face panel for universal
									ZD	Wireless Reporting LynxEM® Control				

MRSEL(RMSEL)-800

LED Emergency Light
Wireless Reporting Compatible

MODEL LIST

MODEL NO	INPUT RATING				OUTPUT RATING	FACE	LETTER COLOR	TEST FACILITY	BATTERY	RECHARGE TIME	EMERGENCY RUN TIME
	VAC	Hz	mA	W	INTEGRAL						
MRSEL-800SR(C/W/M)-x* RMSEL-800SR(C/W/M)-x	120/277VAC	60Hz	31/14	3.14	8 LEDS	Single	Red	Manual	Ni-cad, AAA 4.8V300mA	24 hours	90min.
MRSEL-800DR(C/W/M) RMSEL-800DR(W/M)	120/277VAC	60Hz	31/14	3.14	8 LEDS	Double	Red	Manual	Ni-cad, AAA 4.8V300mA	24 hours	90min.
MRSEL-800SR(C/W/M)-CT-x RMSEL-800SR(C/W/M)-CT-x	120/277VAC	60Hz	31/14	4.1W	8 LEDS	Single	Red	Self-test	Ni-cad, AAA 3.6V300mA	24 hours	90min.
MRSEL-800DR(C/W/M)-CT RMSEL-800DR(C/W/M)-CT	120/277VAC	60Hz	31/14	4.1W	8 LEDS	Double	Red	Self-test	Ni-cad, AAA 3.6V300mA	24 hours	90min.
MRSEL-810SR(C/W/M)-x RMSEL-810SR(C/W/M)-x	120/277VAC	60Hz	28/13	2.38W	8 LEDS	Single	Red	/	/	/	/
MRSEL-810DR(W/M)-x RMSEL-810DR(W/M)-x	120/277VAC	60Hz	28/13	2.38W	8 LEDS	Double	Red	/	/	/	/

PACKAGING

